

*NEW FAMILY!*

# CASA

 **Unilamp**

- *Ultra-compact size*
- *High efficiency energy consumption*
- *Sharp light casted on the wall with low glare*
- *Bollard pre-wired with outdoor cable for quick installation*
- *Excellent corrosion resistance*




# CASA

NEW  
Release



[www.unilamp.co.th/en/p/casa](http://www.unilamp.co.th/en/p/casa)

- WALL UP-DOWNLIGHT
- SURFACE DOWNLIGHT
- BOLLARDS

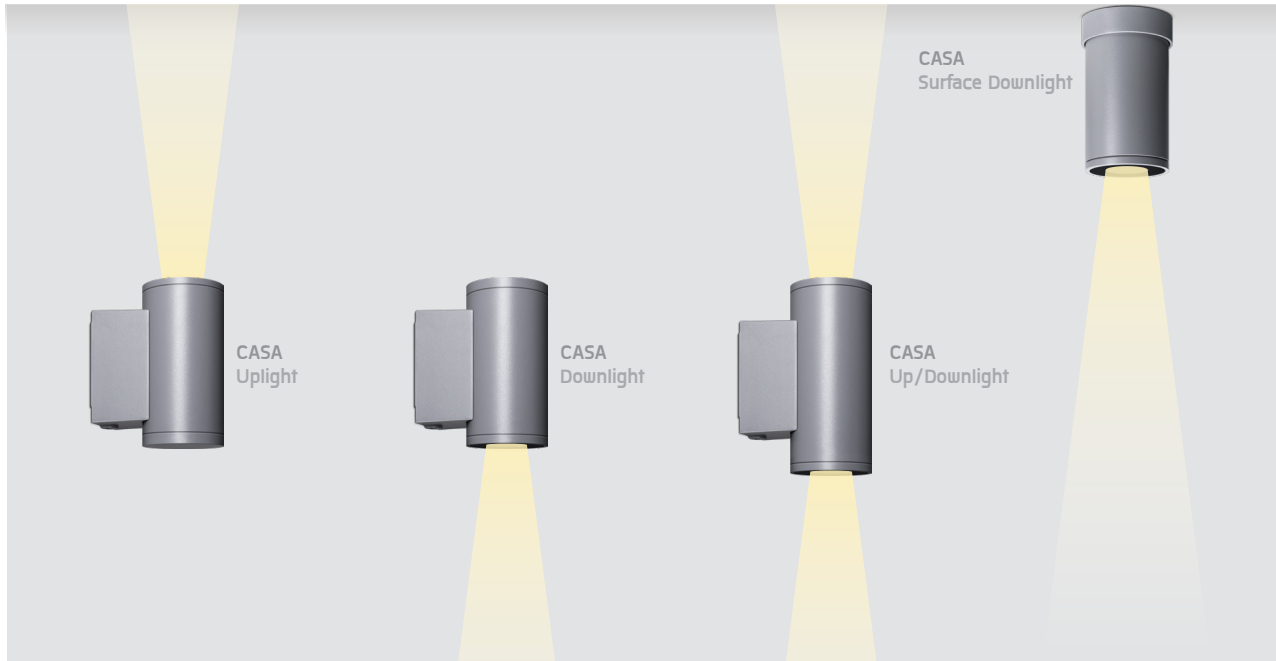

**CASA Bollard**  
• Root Mount  
• Flange Base



**CASA Short Bollard**  
• Root Mount  
• Flange Base





The **CASA** luminaire range is the perfect lighting tool for residential lighting tasks. Although small in size the lighting performance satisfies professional standards. **CASA** is available as single or double directional wall light, surface mounted downlight and bollard. Computer optimized reflectors and diffuser generate light with remarkable brilliance and color consistency. Excellent corrosion resistance is archived through the use of high quality extruded aluminum and enhanced LM6 die cast alloy. **CASA** is suitable for environments up to 50°C.



**Specification**

- Designed, Manufactured and Tested according to IEC 60598.
- LM6 Die Cast Aluminium / Extruded Aluminium Housing.
- Stainless steel screws.
- Nano Ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Polycarbonate diffuser.
- Post-cured silicone gasket.
- High quality LED module and driver.
- GFR PA6.6 terminal block.
- Weather proof TPE grommet.
- Installation must be carried out according to the enclosed product manual.


**Available Color**

- |                  |  |
|------------------|--|
| Black            | [replace the last 2 digits of ordering code with O1] |
| Graphite         | [replace the last 2 digits of ordering code with O2] |
| Dark Grey        | [replace the last 2 digits of ordering code with O3] |
| Aluminium Silver | [replace the last 2 digits of ordering code with O4] |
| White            | [replace the last 2 digits of ordering code with O6] |
| Wooden Brown     | [replace the last 2 digits of ordering code with O7] |







**CASA**  
Up/Downlight

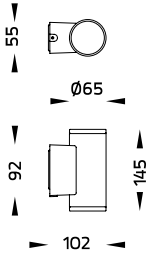


**CASA**  
Downlight



**CASA**  
Uplight



**CASA**  
Surface Downlight



## CASA

**NEW!**

- **WALL UP-DOWNLIGHT**
- **SURFACE DOWNLIGHT**

CASA - Up/downlight / 5054

CASA - Downlight / 5052

CASA - Uplight / 5053

CASA - Surface Downlight / 4052

### Luminaire Performance

150 - 300 lm

3 - 5 W

50 - 60 lm/W

### Beam Options



### Color Temperature

2700K/ 3000K/ 4000K

### Controller





On-Off

**CASA**  
Bollard Root Mount /  
Bollard Root Mount CVDA

**CASA**  
Short Bollard Root Mount /  
Short Bollard Root Mount CVDA

**CASA**  
Bollard Flange Base /  
Bollard Flange Base CVDA

**CASA**  
Short Bollard Flange Base /  
Short Bollard Flange Base CVDA

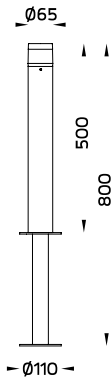

## CASA

NEW!

### BOLLARDS

- CASA – Bollard Root Mount / 7186
- CASA – Bollard Root Mount CVDA / 7186
- CASA – Short Bollard Root Mount / 7187
- CASA – Short Bollard Root Mount CVDA / 7187

#### Luminaire Performance

90 – 120 lm  
3 W  
30 – 40 lm/W

#### Beam Options





#### Color Temperature

2700K/ 3000K/ 4000K

#### Controller

On-Off  
Remote driver On-Off / DALI

#### Accessories



## CASA

NEW!


### BOLLARDS

- CASA – Bollard Flange Base / 7188
- CASA – Bollard Flange Base CVDA / 7188
- CASA – Short Bollard Flange Base / 7189
- CASA – Short Bollard Flange Base CVDA / 7189

#### Luminaire Performance

90 – 120 lm  
3 W  
30 – 40 lm/W

#### Beam Options





#### Color Temperature

2700K/ 3000K/ 4000K

#### Controller

On-Off  
Remote driver On-Off / DALI

#### Accessories



∴ Ideal Application



**Unilamp Co., Ltd.**

461 Ramintra Road, Kannayao, Bangkok 10230 Thailand

Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1

Fax : +66[0]2 943 2419

unilamp@unilamp.co.th | online@unilamp.co.th



[www.unilamp.co.th](http://www.unilamp.co.th)