





LUXBEAT

■ ACCENT LINEAR LIGHT




■ LuxBeat



■ LuxBeat XL +
Accessory Kit
for Surface Mount



■ LuxBeat XL +
Accessory Kit
for Pendant



■ LuxBeat XL +
Accessory Kit
for Wall Mount






■ LuxBeat XL +
Accessory Kit
for Ceiling Recessed




■ LuxBeat XL +
Accessory Kit
for Wall Recessed

■ ACCENT LINEAR LIGHT

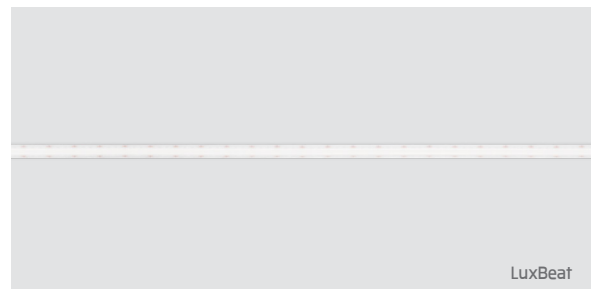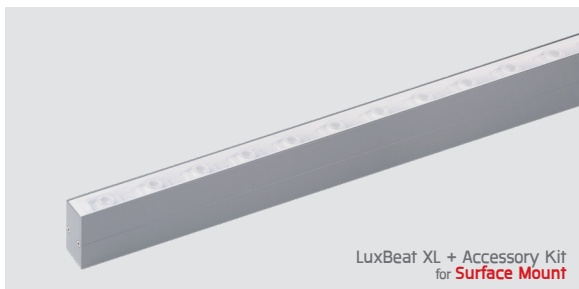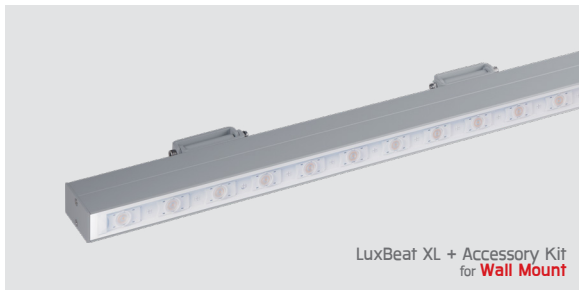

NEW
Added



www.unilamp.co.th/en/p/luxbeat

LuxBeat and **LuxBeat XL** are a range of miniature sized linear accent luminaires with flexible and fixed application. The patented optical system emits homogenous light regardless of the viewing direction.

LuxBeat is the designer's choice for unconstrained creative light installations. High contrasting illumination of building elements is easily possible with the tiny luminaire dimensions and state of the art LED performance.

LuxBeat XL offers a robust aluminum housing that contains a wiring channel for the electrical connection. Bottom mounted in and out connector's assure shadow free easy installation. LuxBeat XL is available as flexible, fixed and tiltable surface mount luminaire, recessed wall and ceiling light, pendant light and inground uplighter. Shorter luminaire lengths are available upon request.

The luminaire is top bendable and can be shortened on site. The use of optional stainless steel mounting clips eliminates the time-consuming pretreatment of the installation surface.



LuxBeat Features:

- IP67 for indoor/ outdoor application.
- No heat sink required. Extra heat sink is recommended if Ta is over 40°C
- High quality silicone extrusion housing.
- Dot-free linear and homogeneous lighting performance.
- Very flexible top-bend style in ultra-thin appearance.
- Infield cutting and assembly (if needed).
- Simple mounted on clean surface by 3M tape (supplied with the strip). Or stainless steel mounting bracket (available as accessory).
- Perfect color consistency and uniformity.
- High light efficacy.
- No dark angle emitting part on both ends.

LuxBeat XL Features:

- IP67 for indoor/ outdoor application.
- Supplied with IP67 cable feeding in-out for continuous installation.
- High quality silicone extrusion housing.
- Dot-free linear and homogeneous lighting performance (diffused version).
- Various mounting options.
- Choices of diffused light or with optical lens.
- Perfect color consistency and uniformity.
- High light efficacy.
- No dark angle emitting part on both ends (diffused version).
- Custom length is available (prepared by the factory).

Notice:

- Use suitable power supply with at least 20% power reserve.
- Maximum continuous installation length is 5m. Longer installation runs will result in electrical overload and excessive heat.
- Check correct polarity before power on.
- For outdoor application, make sure that proper silicone gluing is in place in order to maintain IP67 rating.
- Minimal bending diameter 30 mm. smaller bending diameter causes damage to the LED module.
- Installation, dismantling and repairs must be carried out by qualified electrician.


LuxBeat XL

LuxBeat


• MODULAR SOLUTIONS

LuxBeat XL + Accessory Kit


■ Accessory Kit for Surface Mount




Surface Mount Aluminium Profile.




■ Accessory Kit for Wall Mount




Surface Mount Aluminium Profile.



Adjustable Bracket.



■ Accessory Kit for Pendant



Surface Mount Aluminium Profile.




Suspension Kit with Mounting Loop.



Suspension Kit with Mounting Post.



■ Accessory Kit for Ceiling Recessed




Mounting Profile for Ceiling Recessed.




■ Accessory Kit for Wall Recessed



Mounting Profile for Plasterboard Wall.



Mounting Profile for Wall Niche.



LuxBeat XL Diffused Version




LuxBeat XL Optical Lens



OR

OR

LuxBeat

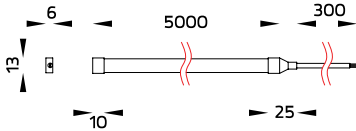


LuxBeat

ACCENT LINEAR LIGHT

LuxBeat / 8101	
Luminaire Performance	
	1930 - 2030 lm/M
	14 W/M
	137 - 145 lm/W/M
Beam Options	
Color Temperature	
	3000K/ 4000K
Controller	
	N/A

Accessories			
	Power cable kit		Fixing Bracket
	IP68 Connector		CV Driver

LuxBeat XL 500/ LuxBeat XL 1000/ LuxBeat XL 2000 **NEW!**

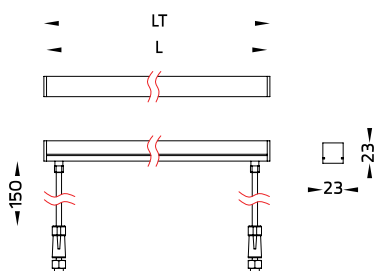

Model	L	LT
OD-8111 LED	500	506
OD-8112 LED	1000	1006
OD-8113 LED	2000	2006



LuxBeat XL

NEW!

ACCENT LINEAR LIGHT

LuxBeat XL 500 / 8111

LuxBeat XL 1000 / 8112

LuxBeat XL 2000 / 8113

Luminaire Performance

210 - 3920 lm
9 - 36 W
23 - 108 lm/W/M

Beam Options



Color Temperature

3000K/ RGBW

Controller

N/A

Accessories



Input Cable



Aluminium Profile



Suspension Kit



Adjustable Bracket



Mounting Profile for Ceiling Recessed










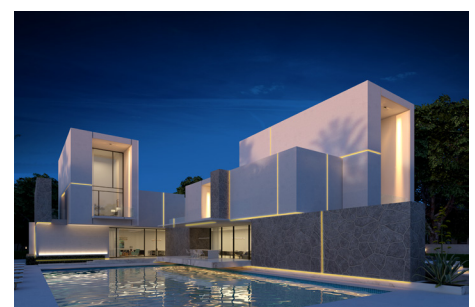
Mounting Profile for Wall Recessed



CV Driver

LuxBeat

Product Code	Product Name	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Controller
OD-8101 	LuxBeat	7 W/M	120°	3000 K 4000 K	680 lm/M 700 lm/M	N/A N/A
		14 W/M	120°	3000 K 4000 K	1930 lm/M 2030 lm/M	N/A N/A
OD-8111 	LuxBeat XL 500	9 W	30°	3000 K	980 lm	N/A
OD-8111 	LuxBeat XL 500	9 W	120°	3000 K RGBW	440 lm 210 lm	N/A
OD-8112 	LuxBeat XL 1000	18 W	30°	3000 K	1960 lm	N/A
OD-8112 	LuxBeat XL 1000	18 W	120°	3000 K RGBW	880 lm 430 lm	N/A
OD-8113 	LuxBeat XL 2000	36 W	30°	3000 K	3920 lm	N/A
OD-8113 	LuxBeat XL 2000	36 W	120°	3000 K RGBW	1760 lm 860 lm	N/A



▸ Ideal Application



Unilamp Co., Ltd.

461 Ramintra Road, Kannayao, Bangkok 10230 Thailand

Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1

Fax : +66[0]2 943 2419

unilamp@unilamp.co.th | online@unilamp.co.th



www.unilamp.co.th