

NEW!

■ **NeoPLACE Direct**
Pole Top Light

NEW!

■ **NeoPLACE Direct**
Wall light

NeoPLACE


- POLE LIGHT & POLE TOP LIGHT
- WALL MOUNT LUMINAIRES

NeoPLACE



www.unilamp.co.th/en/p/neoplace

- POLE LIGHT & POLE TOP LIGHT
- WALL MOUNT LUMINAIRES

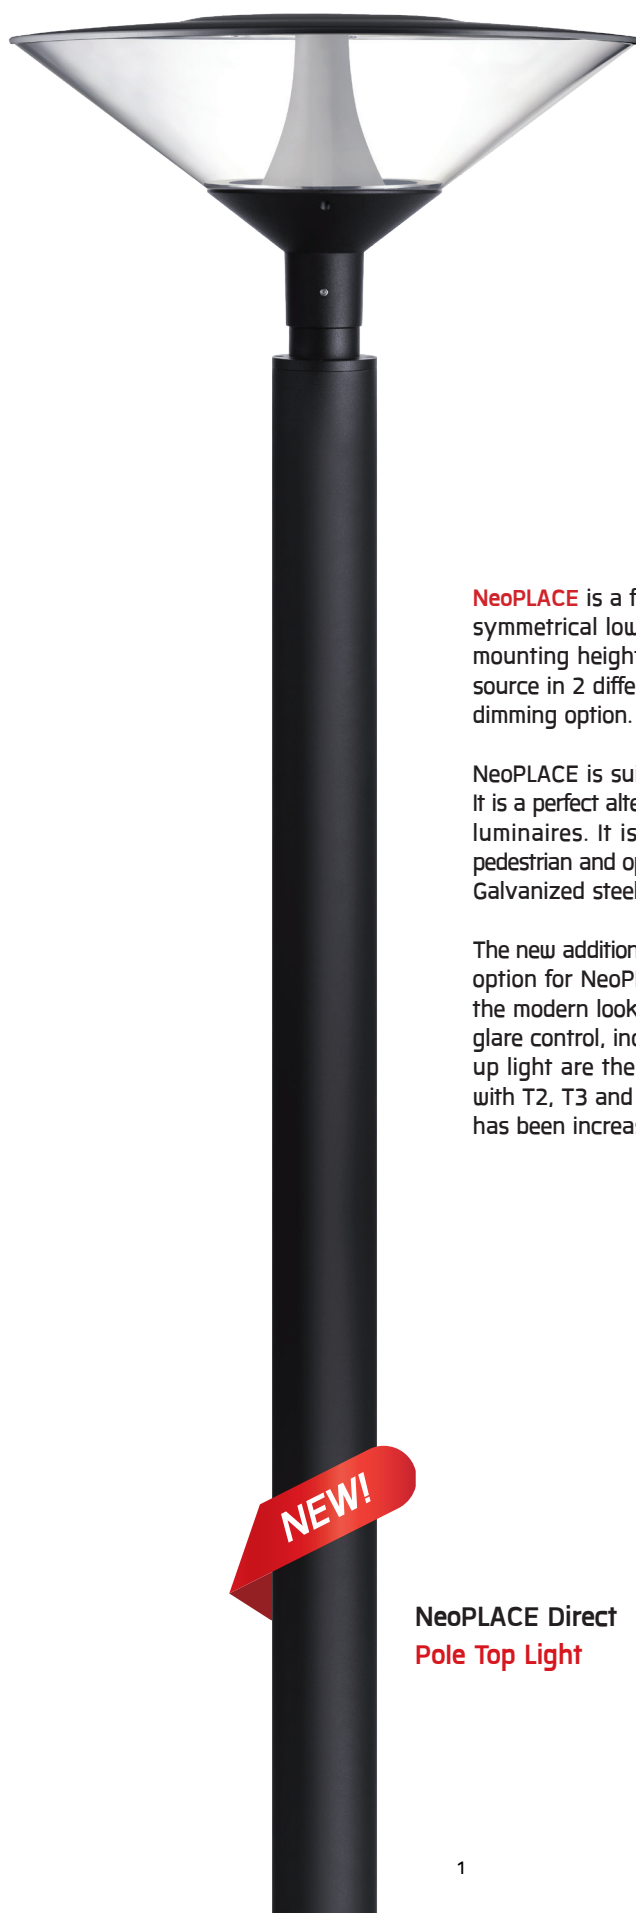

NeoPLACE is a family of large wall light and pole-top luminaires with symmetrical low glare indirect light distribution. The recommended mounting height is between 3 – 5 meters. It is available in LED light source in 2 different color temperature 3000K and 4000K with DALI dimming option.

NeoPLACE is suitable for the place where glare control is preferred. It is a perfect alternative to replace old style cone-shaped conventional luminaires. It is suitable to illuminate parking lots, public parks, pedestrian and open spaces. Available as an option are Aluminium Poles, Galvanized steel poles and anchorage unit for concrete foundations.

The new addition to **NeoPLACE** pole top light, the directional illumination option for NeoPLACE. This is an extension of the indirect variant of the modern looking pole-top range. Wider installation spacing, good glare control, increased luminaire efficacy and minimal amount of up light are the major improvements. NeoPLACE Direct is available with T2, T3 and T5 light distribution. The ambient temperature rating has been increased to 50°C.

NEW!

NeoPLACE Direct
Pole Top Light



Specification


- Designed, Manufactured and Tested according to IEC 60598.
- LM6 Die Cast Aluminium and Spun Aluminium body.
- Stainless steel screws.
- Nano Ceramic surface conversion.
- Double layer coating.
- Polycarbonate protective cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Pre-wired cable from the factory.
- Installation work must carried out according to the enclosed product manual.

Available Color

Black	[replace the last 2 digits of ordering code with 01]
Graphite	[replace the last 2 digits of ordering code with 02]
Dark Grey	[replace the last 2 digits of ordering code with 03]
Aluminium Silver	[replace the last 2 digits of ordering code with 04]
White	[replace the last 2 digits of ordering code with 06]
Wooden Brown	[replace the last 2 digits of ordering code with 07]




WANAPIROM ROMKLAO PARK, BANGKOK – THAILAND

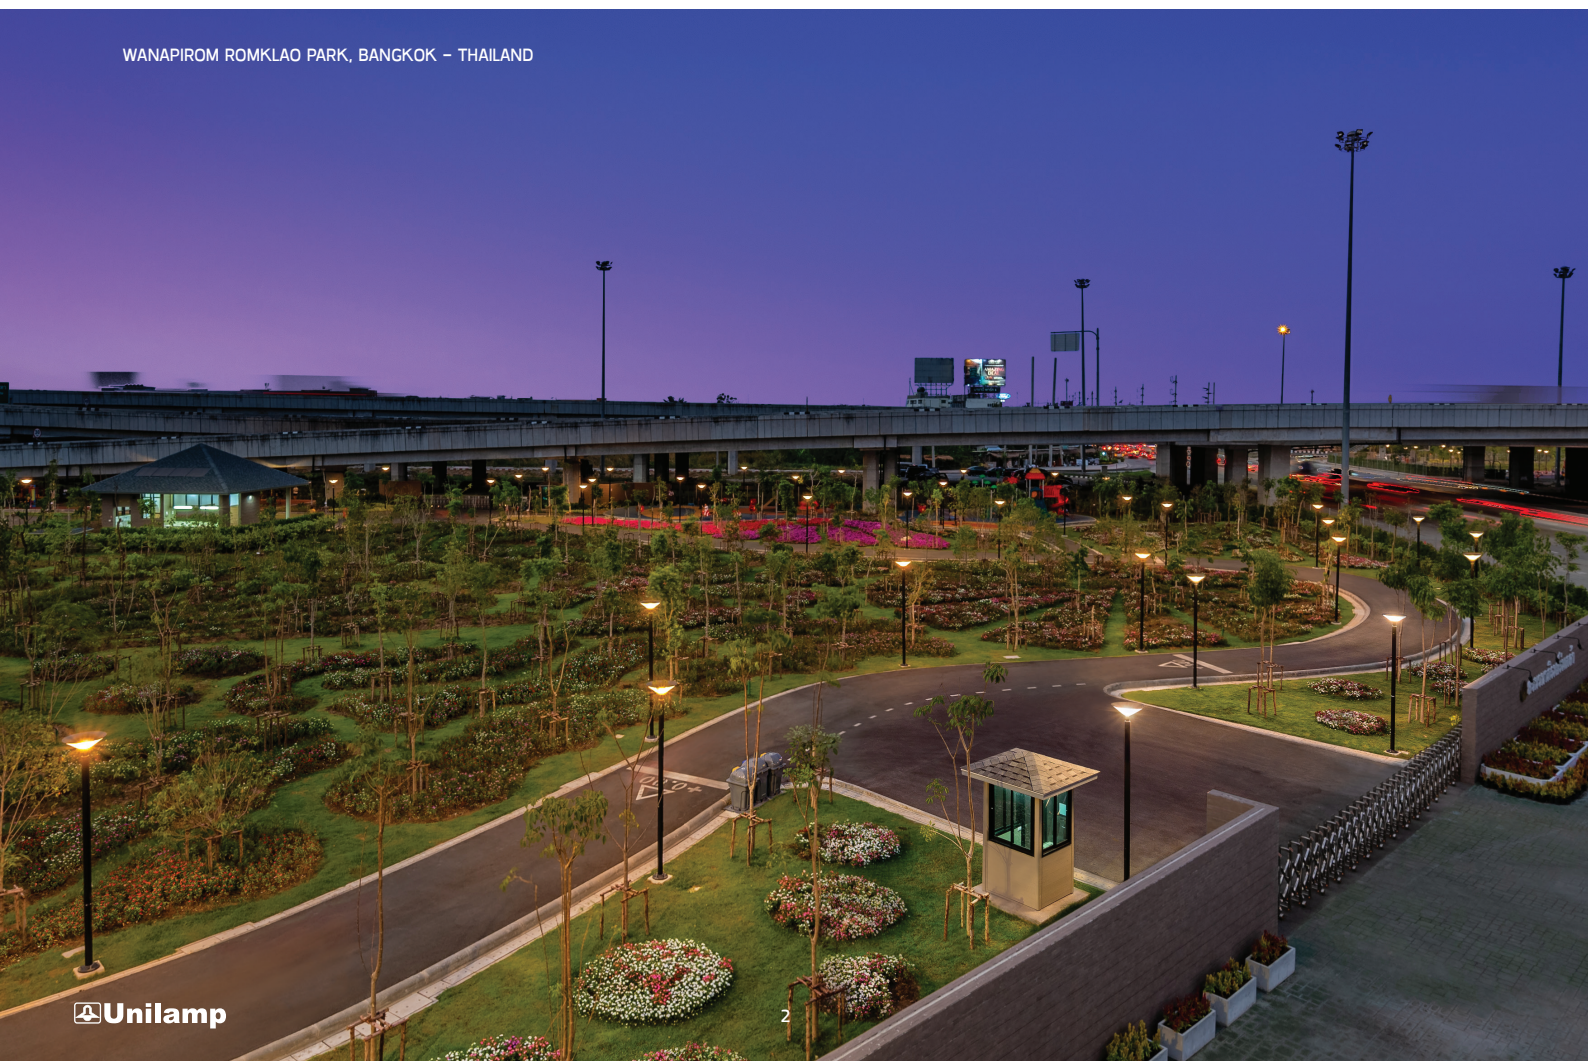


NeoPLACE


NeoPLACE
Pole Top Light



NeoPLACE
Pole Top Light / Double head



NeoPLACE
Wall light



NeoPLACE

POLE LIGHT & POLE TOP LIGHT

NeoPLACE - Pole Top Light / 7220

NeoPLACE - Pole Top Light / Double head / 7230

Luminaire Performance

1920 - 6260 lm

25 - 70 W

64 - 91 lm/W

Beam Options



Color Temperature

3000K/ 4000K

Controller

On-Off/ 1-10V/ DALI

NeoPLACE

WALL MOUNT LUMINAIRES

NeoPLACE - Wall light / 7620

Luminaire Performance

1920 - 3130 lm

25 - 35 W

64 - 91 lm/W

Beam Options



Color Temperature

3000K/ 4000K

Controller

On-Off/ 1-10V/ DALI

Accessories



Uplight shield



Aluminium pole



Steel pole



Anchor bolt

NeoPLACE

NeoPLACE Direct
Pole Top Light




NEW!

NeoPLACE Direct
Pole Top Light / Double head

NEW!

NeoPLACE Direct
Wall light

NEW!



NeoPLACE


POLE LIGHT & POLE TOP LIGHT

NeoPLACE Direct – Pole Top Light / 7760
NeoPLACE Direct – Pole Top Light / Double head / 7761

Luminaire Performance

1990 – 6440 lm
24 – 72 W
75 – 97 lm/W

Beam Options



Color Temperature

2700K / 3000K / 4000K

Controller

On-Off / 1-10V / DALI / CASAMBI

NeoPLACE


WALL MOUNT LUMINAIRES

NeoPLACE Direct – Wall light / 7660

Luminaire Performance

1990 – 3220 lm
24 – 36 W
75 – 97 lm/W

Beam Options



Color Temperature

2700K / 3000K / 4000K

Controller

On-Off / 1-10V / DALI / CASAMBI

Accessories



Aluminium pole







Steel pole





Anchor bolt

NeoPLACE

Product Code	Product Name	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Controller
	NeoPLACE - Pole Top Light	25 W	N/A	3000 K 4000 K	2180 lm 2290 lm	On-Off
		30 W	N/A	4000 K	1920 lm	On-Off / 1-10V
		35 W	N/A	3000 K 4000 K	2970 lm 3130 lm	On-Off / DALI
	NeoPLACE - Pole Top Light / Double head	50 W	N/A	3000 K 4000 K	4360 lm 4580 lm	On-Off
		60 W	N/A	4000 K	3840 lm	On-Off / 1-10V
		70 W	N/A	3000 K 4000 K	5940 lm 6260 lm	On-Off / DALI
	NeoPLACE Direct - Pole Top Light	24 W	T2	4000 K	2280 lm	On-Off / 1-10V / DALI / CASAMBI
			T3	4000 K	2120 lm	
			T4	4000 K	2210 lm	
			T5	4000 K 4000 K	2120 lm 2350 lm	
		25 W	T2	2700 K 3000 K	2140 lm 2140 lm	On-Off / 1-10V / DALI / CASAMBI
			T3	2700 K 3000 K	1990 lm 1990 lm	
			T4	2700 K 3000 K	2080 lm 2080 lm	
			T5	2700 K 3000 K 3000 K	1990 lm 2200 lm 1990 lm 2200 lm	
		34 W	T2	4000 K	3130 lm	On-Off / 1-10V / DALI / CASAMBI
			T3	4000 K	2910 lm	
			T4	4000 K	3040 lm	
			T5	4000 K 4000 K	2910 lm 3220 lm	
		36 W	T2	2700 K 3000 K	2940 lm 2940 lm	On-Off / 1-10V / DALI / CASAMBI
			T3	2700 K 3000 K	2730 lm 2730 lm	
			T4	2700 K 3000 K	2850 lm 2850 lm	
			T5	2700 K 2700 K 3000 K 3000 K	2730 lm 3020 lm 2730 lm 3020 lm	
	NeoPLACE Direct - Pole Top Light / Double head	48 W	T2	4000 K	4560 lm	On-Off / 1-10V / DALI / CASAMBI
			T3	4000 K	4240 lm	
			T4	4000 K	4420 lm	
			T5	4000 K 4000 K	4240 lm 4700 lm	
		50 W	T2	2700 K 3000 K	4280 lm 4280 lm	On-Off / 1-10V / DALI / CASAMBI
			T3	2700 K 3000 K	3980 lm 3980 lm	
			T4	2700 K 3000 K	4160 lm 4160 lm	
			T5	2700 K 2700 K 3000 K 3000 K	3980 lm 4400 lm 3980 lm 4400 lm	
		68 W	T2	4000 K	6260 lm	On-Off / 1-10V / DALI / CASAMBI
			T3	4000 K	5820 lm	
			T4	4000 K	6080 lm	
			T5	4000 K 4000 K	5820 lm 6440 lm	
		72 W	T2	2700 K 3000 K	5880 lm 5880 lm	On-Off / 1-10V / DALI / CASAMBI
			T3	2700 K 3000 K	5460 lm 5460 lm	
			T4	2700 K 3000 K	5700 lm 5700 lm	
			T5	2700 K 2700 K 3000 K 3000 K	5460 lm 6040 lm 5460 lm 6040 lm	

NeoPLACE

Product Code	Product Name	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Controller
OD-7620 	NeoPLACE - Wall light	25 W	N/A	3000 K 4000 K	2180 lm 2290 lm	On-Off / 1-10V / DALI / CASAMBI
		30 W	N/A	4000 K	1920 lm	On-Off / 1-10V / DALI / CASAMBI
		35 W	N/A	3000 K 4000 K	2970 lm 3130 lm	On-Off / 1-10V / DALI / CASAMBI
OD-7660 	NeoPLACE Direct - Wall light	24 W	T2	4000 K	2280 lm	On-Off / 1-10V / DALI / CASAMBI
			T3	4000 K	2120 lm	
			T4	4000 K	2210 lm	
			T5	4000 K	2350 lm	
		25 W	T2	2700 K 3000 K	2140 lm 2140 lm	On-Off / 1-10V / DALI / CASAMBI
			T3	2700 K 3000 K	1990 lm 1990 lm	
			T4	2700 K 3000 K	2080 lm 2080 lm	
			T5	2700 K 2700 K 3000 K 3000 K	1990 lm 2200 lm 1990 lm 2200 lm	
		34 W	T2	4000 K	3130 lm	On-Off / 1-10V / DALI / CASAMBI
			T3	4000 K	2910 lm	
			T4	4000 K	3040 lm	
			T5	4000 K 4000 K	2910 lm 3220 lm	
		36 W	T2	2700 K 3000 K	2940 lm 2940 lm	On-Off / 1-10V / DALI / CASAMBI
			T3	2700 K 3000 K	2730 lm 2730 lm	
			T4	2700 K 3000 K	2850 lm 2850 lm	
			T5	2700 K 2700 K 3000 K 3000 K	2730 lm 3020 lm 2730 lm 3020 lm	

Application Reference



Unilamp Co., Ltd.

461 Ramintra Road, Kannayao, Bangkok 10230 Thailand

Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1

Fax : +66[0]2 943 2419

unilamp@unilamp.co.th | online@unilamp.co.th



www.unilamp.co.th