


NEOS

NEW
Release



www.unilamp.co.th/en/p/neos

- SURFACE WASHER & FLOOD LIGHT
 - AREA LIGHT
-

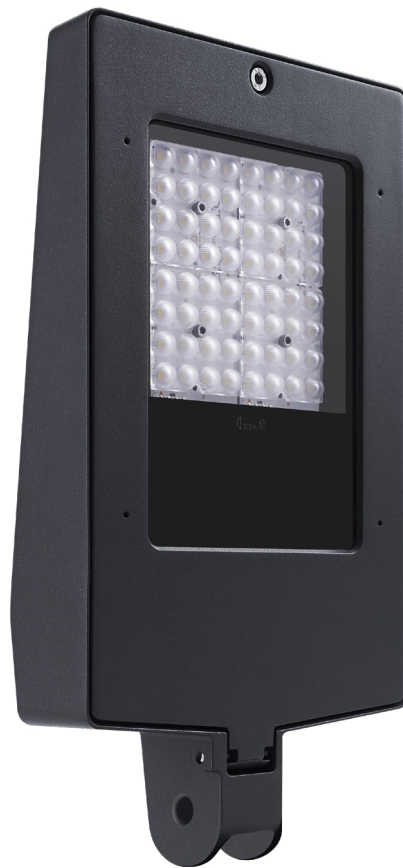

NEOS is a small sized high performing area light. Outstanding optical efficacy, high ambient temperature rating and a wide range of mounting accessory makes **NEOS** a highly competitive product. The smooth curved design eliminates accumulation of water and dust. The unobtrusive slim design is a great match for commercial and residential lighting tasks. The area light can be either equipped with a photocell, DALI-2 control or basic on-off control gear.

NEOS can be equipped with mounting accessories for pole integrated mounting, pole bracket, wall and wall corner. The pole bracket is suitable for Pole diameters up to 105 mm.



Specification



- Designed, Manufactured and tested according to IEC 60598.
- High-pressure Die Cast Aluminium body.
- Stainless steel screws.
- Nano Ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.

Available Color

- | | |
|------------------|--|
| Black | [replace the last 2 digits of ordering code with 01] |
| Graphite | [replace the last 2 digits of ordering code with 02] |
| Dark Grey | [replace the last 2 digits of ordering code with 03] |
| Aluminium Silver | [replace the last 2 digits of ordering code with 04] |
| White | [replace the last 2 digits of ordering code with 06] |
| Wooden Brown | [replace the last 2 digits of ordering code with 07] |



Illumination level : 20 lux Ave.

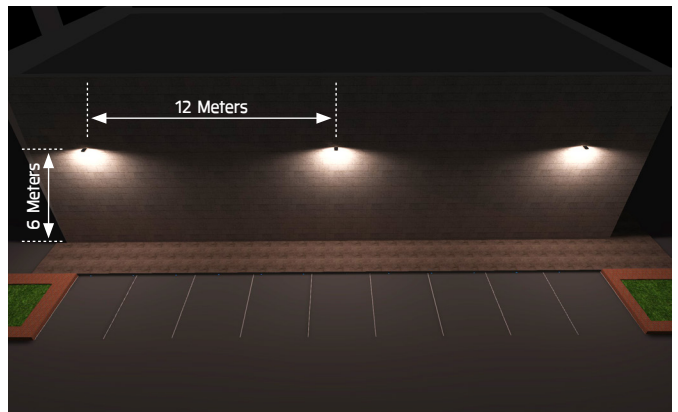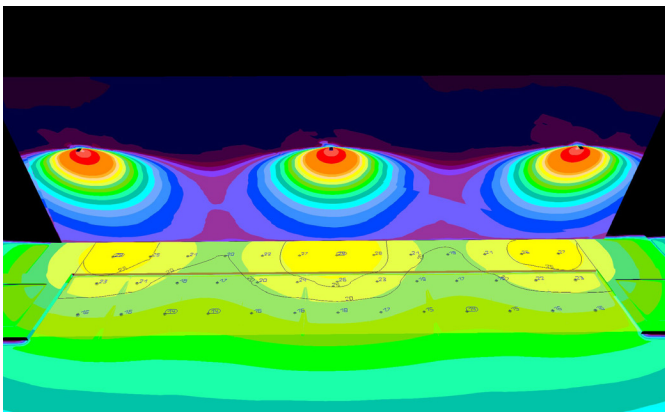

• MODULAR SOLUTIONS

NEOS Flood Light

For Pole Mount Adaptor Configuration



- Pole Mount Adaptor
 - Pole mount adaptor for square pole.
 - Pole mount adaptor for pole dia 60 mm. / dia 76 mm. / dia 102-105 mm.

NEOS Flood Light


For Ground Mount / Wall Mount Configuration



- Ground Mount / Wall Mount Adaptor



- Turnable Round Base for Ground mount / Wall mount




- Pole Mount Adaptor
 - Pole mount adaptor for square pole.

- Corner Bracket.



- Pole Mount Adaptor
 - Pole mount adaptor for square pole.

- Wall Spacer

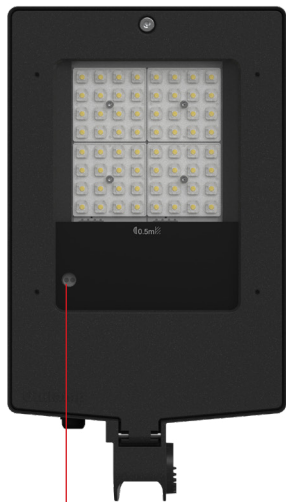


- Photo Cell for NEOS Flood Light / NEOS Area Light
**Pre-assembly from factory*



- Glare Shield Cap for NEOS Flood Light / NEOS Area Light

• MODULAR SOLUTIONS

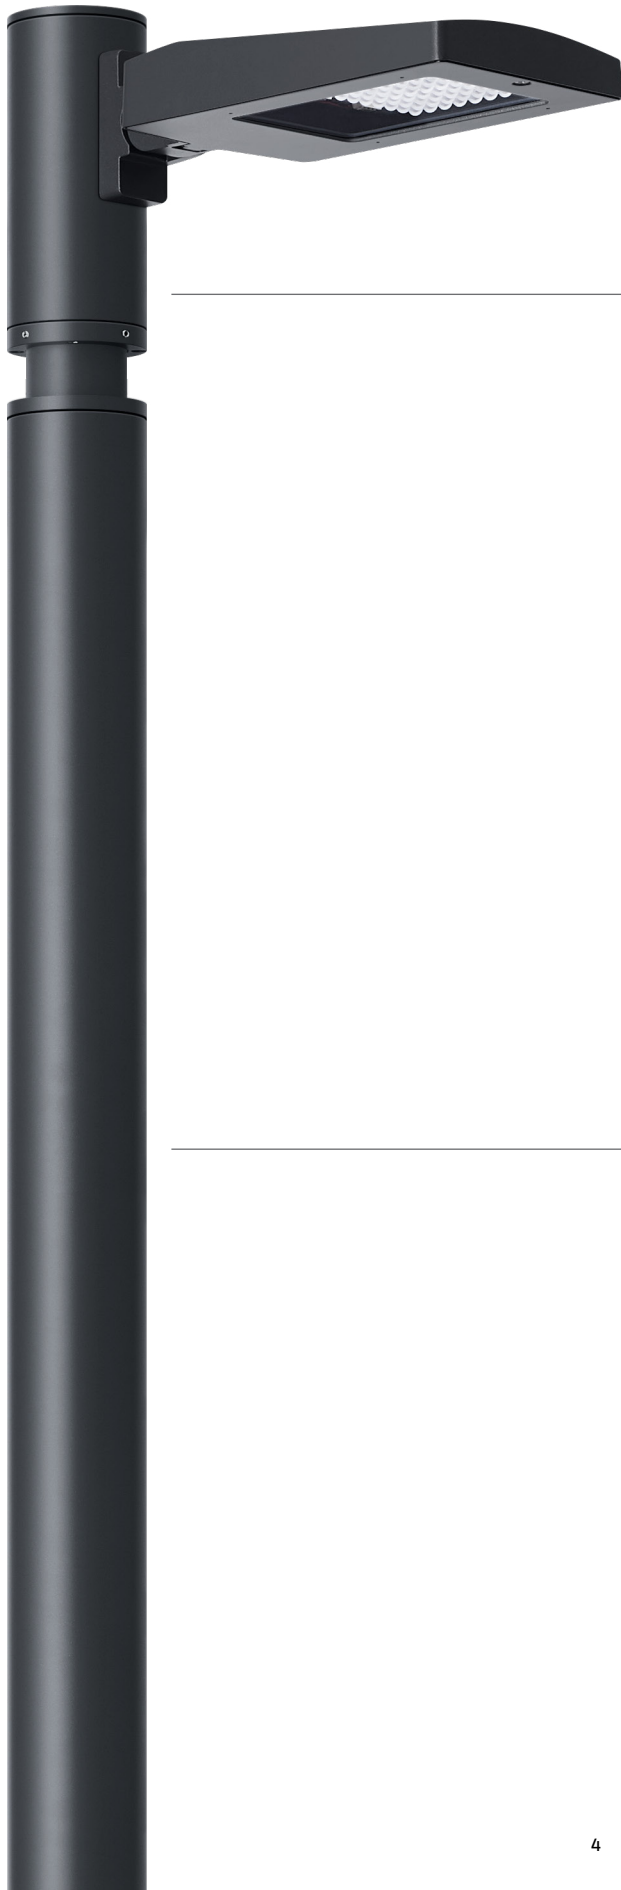

NEOS Area Light



- NEOS Area Light
Single Sided
(for Spigot Size Ø76 mm.)


















- NEOS Area Light
Double Sided
(for Spigot Size Ø76 mm.)




- Pole
 - Aluminium Pole.
 - Galvanized Steel Pole.

• MODULAR SOLUTIONS

				
Accessory		NEOS – Flood Light without base	NEOS – Area Light / Single Sided	NEOS – Area Light / Double Sided
 Photo Cell – Control one luminaire. [Pre-assembly from factory].		●	●	●
 Glare Shield Cap.		●	●	●
 Pole mount adaptor for square pole.		●	–	–
 Pole mount adaptor for pole dia 60 mm.		●	–	–
 Pole mount adaptor for pole dia 76 mm.		●	–	–
 Pole mount adaptor for pole dia 102-105 mm.		●	–	–
 Ground mount base or Wall mount base.		●	–	–
 Turnable round base for Ground mount or Wall mount.		●	–	–
 Wall Spacer.		●	–	–
 Corner Bracket.		●	–	–
 Aluminium Pole Diameter 105 mm. Height 3000 mm. / 3500 mm. / 4000 mm. with Spigot Size 76 mm.		–	●	●
 Steel Pole Diameter 114 mm. Height 6000mm. / Steel Pole Diameter 140&114 mm. Height 7000 mm. / 8000 mm. with Spigot Size 76 mm.		–	●	●

NEOS
Flood Light without base



NEOS
Area Light / Single Sided



NEW!



NEOS
Area Light / Double Sided

NEW!

NEW!

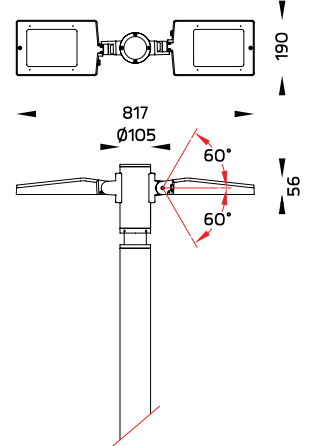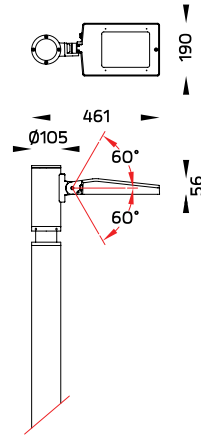

NEOS

SURFACE WASHER & FLOOD LIGHT

NEOS – Flood Light with out base / 2356

Luminaire Performance

3050 – 5150 lm
25 – 34 W
122 – 151 lm/W

Beam Options



Color Temperature

3000K/ 4000K

Controller

On-Off/ 1-10V/ DALI/ CASAMBI

NEOS

AREA LIGHT


NEOS – Area Light / Single Sided / 7246

NEOS – Area Light / Double Sided / 7247

Luminaire Performance

3050 – 10300 lm
25 – 68 W
122 – 151 lm/W

Beam Options




Color Temperature

3000K/ 4000K

Controller

On-Off/ 1-10V/ DALI/ CASAMBI

Accessories

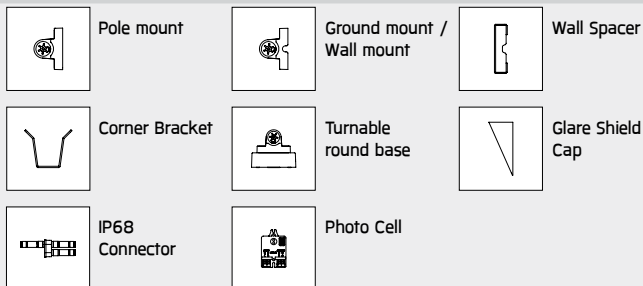

Accessories

