



PRIMUS Clear



Newly Added

PRIMUS Opal

# PRIMUS

POLE TOP LIGHT

# PRIMUS

NEW  
Release




[www.unilamp.co.th/en/p/primus](http://www.unilamp.co.th/en/p/primus)

## ■ POLE LIGHT & POLE TOP LIGHT

The design of **PRIMUS** is inspired by urban furniture elements. The distinctive circular shape with or without upright shield adds a playful architectural option for urban spaces, walkways, parks and plazas. The excellent luminaire performance creates pleasant glare free illumination suitable for most pedestrian and bicycle ways. The clear version of **PRIMUS** with CAD optimized lens array allows highly energy efficient lighting schemes with wide luminaire spacing.

**PRIMUS** is suitable for pole diameters from Ø60mm to Ø76mm. The luminaire is equipped with a surge protection device and on request can be integrated in light management system by utilizing a Zhaga book 18 connector and DALI2 control gear.

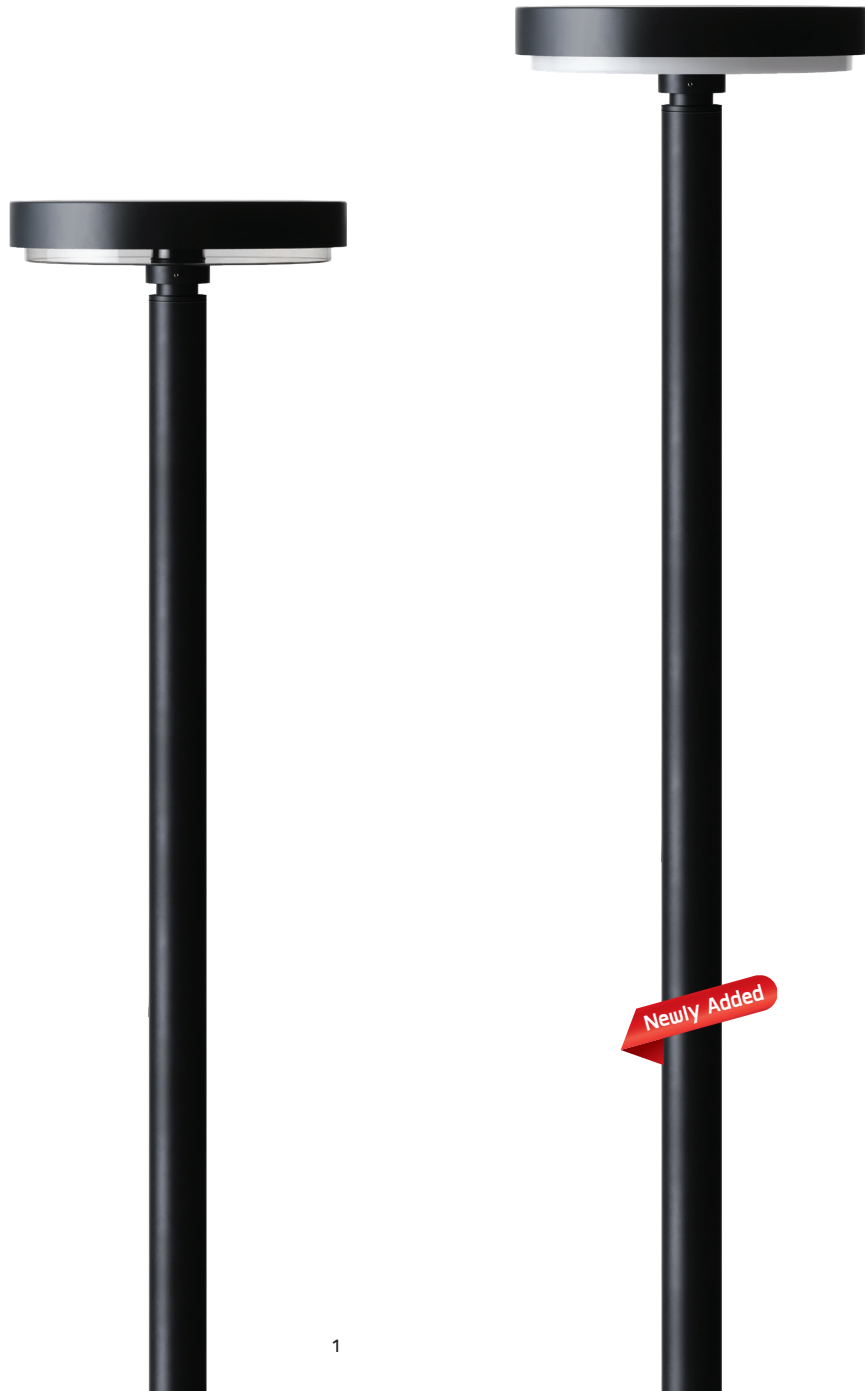

Newly Added



Specification

- High quality LED module and driver.
- Designed, Manufactured and Tested according to IEC 60598.
- Stainless steel screws.
- Post-cured silicone gasket.
- Nano Ceramic surface conversion.
- Polycarbonate protective cover.
- Double layer coating.
- Pre-wired cable from the factory.
- LM6 Die Cast Aluminium and Spun Aluminium body.
- Shaded option for comfortable glare free illumination.
- Clear option with CAD optimized optical lenses.
- Prewired with 600mm long H05RN-F or equivalent cable
- Built-in pressure equalization element
- Installation work must be carried out according to the enclosed product manual.

Available Color

Black	(replace the last 2 digits of ordering code with 01)
Graphite	(replace the last 2 digits of ordering code with 02)
Dark Grey	(replace the last 2 digits of ordering code with 03)
Aluminium Silver	(replace the last 2 digits of ordering code with 04)
White	(replace the last 2 digits of ordering code with 06)
Wooden Brown	(replace the last 2 digits of ordering code with 07)

**PRIMUS**  
with Uplight Shield Cover

## • MODULAR SOLUTIONS




**Uplight Shield Cover**  
AUN-GSH-0032-XX




**PRIMUS Opal**  
7719



**PRIMUS Clear**  
7720

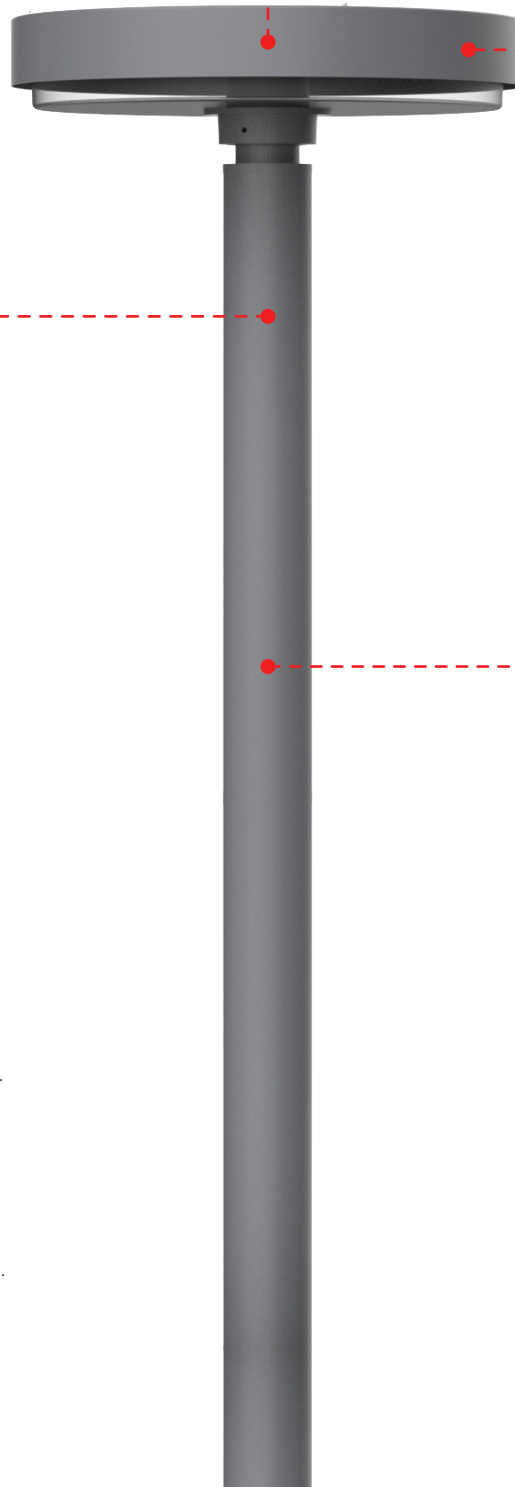


**Pole**



**Straight Cylindrical Extruded Aluminium Pole**

Diameter: 105 mm.  
Height: 3000/3500/4000 mm.

AUN-POL-0006-XX / AUN-POL-0007-XX /  
AUN-POL-0008-XX



**Hot-Dipped Galvanized Steel Pole**

Steel Pole

Diameter: 102 mm. Height: 4000/5000/6000 mm.

AUN-POL-0012-XX / AUN-POL-0013-XX  
AUN-POL-0029-XX

Diameter: 114 mm. Height: 6000 mm.

AUN-POL-0018-XX

Stepped Steel Pole

Diameter: 140/114 mm. Height: 7000/8000 mm.

AUN-POL-0019-XX / AUN-POL-0020-XX

**Anchor Bolt Kit**



**for Aluminium Pole**

AUN-ACB-0005-00



**for Galvanized Steel Pole**

Diameter: 102 mm.  
Diameter: 114 mm.  
Diameter: 114 & 140 mm.


AUN-ACB-0008-00 / AUN-ACB-0009-00



# PRIMUS

PRIMUS Opal  
POLE TOP LIGHT

PRIMUS Clear  
POLE TOP LIGHT



## PRIMUS

### POLE LIGHT & POLE TOP LIGHT

PRIMUS Opal – Pole Top Light / 7719

**NEW!**

PRIMUS Clear – Pole Top Light / 7720


#### Luminaire Performance

3150 – 10250 lm

38 – 67 W

80 – 152 lm/W

#### Beam Options



#### Color Temperature

3000K / 4000K

#### Controller

On-off / DIM 1-10V / DALI / CASAMBI

#### Accessories



Aluminium pole



Steel pole





Anchor bolt



Shield Cover

PRIMUS

Product Code	Product Name	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Controller
 <b>NEW!</b> OD-7719	PRIMUS Opal	38 W	T5	3000 K	3150 lm	On-Off/ DIM 1-10V/ DALI / CASAMBI
				4000 K	3320 lm	
		55 W		3000 K	4420 lm	
				4000 K	4670 lm	
 OD-7720	PRIMUS Clear	44 W	T3	3000 K	5670 lm	On-Off/ DIM 1-10V/ DALI / CASAMBI
				4000 K	5970 lm	
		62 - 63 W		3000 K	7900 lm	
				4000 K	8310 lm	
		44 W	T4	3000 K	5270 lm	
				4000 K	5550 lm	
		62 - 63 W		3000 K	7340 lm	
				4000 K	7720 lm	
		50 W	T5	3000 K	6670 - 7010 lm	
				4000 K	7040 - 7400 lm	
		67 W		3000 K	9270 - 9710 lm	
				4000 K	9760 - 10250 lm	

PRIMUS

➤ **Ideal** Application



**Unilamp Co., Ltd.**

461 Ramintra Road, Kannayao, Bangkok 10230 Thailand

Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1

Fax : +66[0]2 943 2419

unilamp@unilamp.co.th | online@unilamp.co.th



[www.unilamp.co.th](http://www.unilamp.co.th)